




CANTER 7C15

LHD

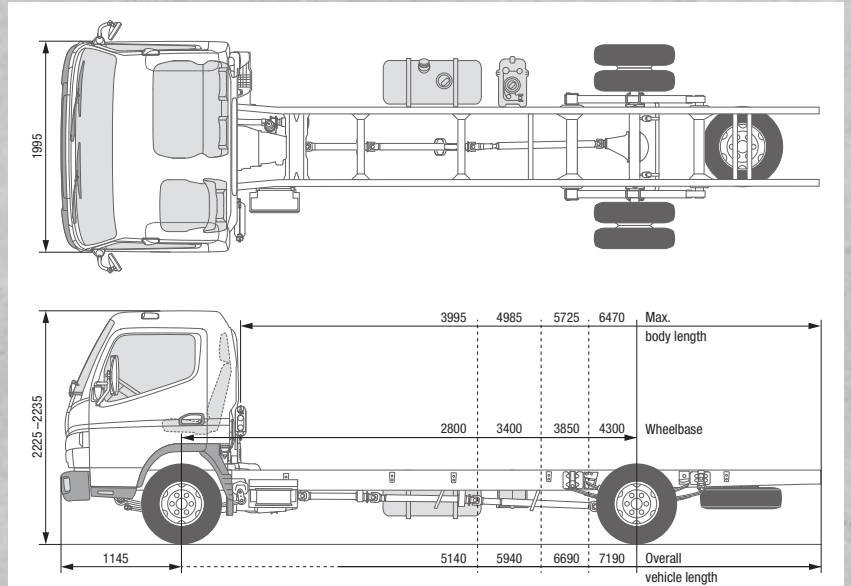

MODEL / VEHICLE TYPE

MODEL / VEHICLE TYPE	7C15			
Cab type / crew	Comfort, single cab / 3			
Model variant	46892312	46892512	46892712	46892812
FUSO model code	FEB71CL4SEUT	FEB71EL4SEUT	FEB71GL4SEUT	FEC71HL4SEUT

DIMENSIONS mm

Wheelbase		2800	3400	3850	4300
Overall length		5140	5940	6690	7190
Cab length		1625			
Width overall		2025			
Cab width		1995			
Height overall		2225	2225	2225	2235
Track width	Front / rear	1665 / 1560			1665 / 1670
Frame height (at end of frame)		830			
Ground clearance		185			
Cab to rear axle		2275	2875	3325	3775
Cab to end of frame		3470	4270	5020	5520
Max. body length**		3995	4985	5725	6470
Frame width		750			
Front overhang		1145			
Rear overhang		1195	1395	1695	1745
Front axle to front of body		625			
Recommended distance cab to body		100			

WEIGHTS kg

Empty weight*		2500	2535	2550	2595
	Front* / rear*	1630 / 870	1640 / 895	1645 / 905	1655 / 940
Minimum vehicle weight		2660			
Gross vehicle weight / gross combination weight		7490 / 10990			
Axle loads	Front / rear	3100 / 5800	3100 / 5800	3100 / 5740	3100 / 5680
Towed weight	Braked / unbraked	3500 / 750			
Chassis load bearing capacity		4990	4955	4940	4895

CALCULATED OUTPUT


Max. speed	km/h	130			
Min. turning circle (m)	Kerb to kerb	10.4	12.2	13.8	15.2
	Wall to wall	11.8	13.8	15.2	16.6

* including coolant, oil, 90% fuel, tyre sealant, tools and driver weighing 75 kg; ** calculated maximum value. Should be checked depending on the body installed and the particular application

Subject to change without notice. The information in this data sheet should be considered approximate. The illustrations may show accessories and special equipment not part of the standard specification. This data sheet may also contain models and support services not available in certain countries.



CANTER 7C15 LHD

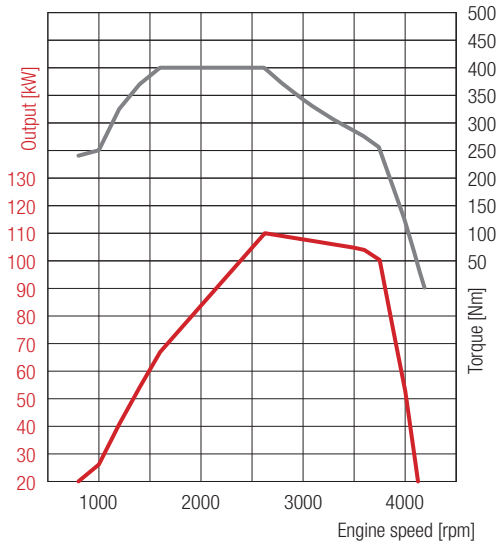

4P10 – 110 kW (150 PS)
 400 Nm@1600 rpm
 110 kW@2625 rpm

ENGINE (Euro VI)

Type	Water-cooled four-stroke diesel engine with turbocharger, intercooler and direct injection			
No. of cylinders	4/in-line			
Capacity	2998 cm ³			
Peak output	110 kW (150 hp) / 2625 rpm			
Rated torque	400 Nm / 1600 rpm			
Diesel particulate filter	Service life approx. 300,000 km			
Alternator	Alternating current 12V, 140A			
Exhaust gas aftertreatment	SCR + DPF			
PTO (optional)	Type	31 kW with flange	62 kW with flange	31 kW for directly connected pumps
	Torque at peak output	196 Nm	392 Nm	196 Nm
	Gear ratios	1:0.644	1:0.723	1:0.638
	Engine speed at peak output	1500 rpm		

POWERTRAIN

Transmission	Model	Manual gearbox, 5 forward gears, 1 reverse gear		
	Gear ratio	5.494 - 3.193 - 1.689 - 1.000 - 0.723 Rev. 5.494		
Rear axle gear ratio	Ratio	4.875		

CHASSIS

Front axle / rear axle	Model	F350T / R035T		
	Load-bearing capacity front/rear	3100/5800 kg (2800 mm); 3100/5800 kg (3400 mm); 3100/5740 kg (3850 mm); 3100/5680 kg (4300 mm)		
Tyres		205/75R17.5C 124/122 M		
		Twin tyres at rear, tyres with optimised rolling resistance		
Wheel		17.5 x 6.00 - 127 - 9t - 6 wheel bolts		
Steering		LHD		
		Recirculating-ball steering with power assist, tilting telescopic steering column with steering-wheel lock		
Brake	Service brake	Hydraulic with vacuum power assist, dual-circuit with load-dependent brake proportioning valve at rear wheels		
	Front / rear	Disc brake (252 x 40)		
	Parking brake	Mechanical expanding brake on drive shaft at rear of transmission		
	Auxiliary brake	Exhaust brake (50 kW)		
Suspension	Front / rear	Semi-elliptic leaf spring with shock absorber and stabiliser		
Frame	Type	Ladder-type frame with reinforcements and crossmembers		
Fuel tank capacity		100 litres		
Electrical system – batteries		12 Volt (100 AH - 760 A(EN))		